

PROMET

Feel Safe ■

PRODUCT CATALOGUE



We will make it easy for you to make a purchase decision by selecting from our extensive range of products marked with the following symbols.



Products marked with this sign are best selling products. For our business partners it is a guarantee of sales success and customer satisfaction.



Products marked with this trademark are highly competitive, feature more functionality, or exceptionally attractive price / quality ratio. Our trading partners give it more arguments in relation to the customer and ensure increased sales.



Our new products are those that respond to your current market needs so that your offer is even more diversified and competitive.



ECB-S is the largest international security product certification body, bringing together the most prestigious research institutes in Europe. Possession of the ECB-S certificate is confirmation of the highest standards of protection.



The patented filling formula gives you less weight while maintaining the highest safety standards. Reduced weight is an advantage for transportation and assembly.




Patented, special type of Ultra High Performance Concrete, with increased hardness compared to traditional concrete, comparable to solid stone.



Quality without compromise. Products bearing this mark are characterized by the highest standards of manufacture and the most up-to-date technologies and materials.



Laser cutting technology used in our production process allows for greater precision of the structure.



The products marked with this sign feature a multi-layer reinforced door and wall construction. This is the «safe in safe» effect.



Multilayered construction. In products marked with this sign the walls consist of alternating layers of sheet metal and special reinforced fillings.

Content

2 Promet Worldwide

4 Manufacturing

Commercial Safes

7 GRANIT **Grade I, LFS 30**

8 GARANT **Grade I, LFS 60**

10 BASTION M **Grade II T2, LFS 30**

12 FORT M **Grade III, LFS 30**

13 BANKER M **Grade IV, LFS 30**

14 BURGAS **Grade V, LFS 30**

Private Safes

16 BS **S1**

17 SB **S2**

18 BRF **S2, LFS 30**

20 FRS **S2, LFS 60**

22 FSB **S2, LFS 60**

23 RS2 **S2**

25 BARRIER **Grade 0, LFS 30**

26 ASK **Grade I**

28 CBS

Double Door Safes

31 BRANDMAUER **S2**

32 FSB **S2, LFS 60**

33 GARANT **Grade I, LFS 60**

Deposit Safes

35 ASD **S1**

36 DSC **Grade DI**

38 DT

40 DB

Gun Safes

42 ARSENAL **S1**

44 ASG/WS **Grade I, LFS 30**

45 WSL **Grade I**

Fire Resistant Safes

47 FC **LFS 60**

48 VFC **LFS 60**

49 FRS **LFS 60**

50 BM **LFS 30**

Vault Doors

52 AVD **Grade III**

54 AVD **Grade V**

56 EVD **Grade I**

Furniture Safes

58 T

Hotel Safes

59 SH

Technical Information

61 Locks, Dials, Keypads

64 Transport information

67 Security levels and insurance amounts

68 General terms and conditions

PROMET Worldwide



**Export to 70 countries
and 11 own international
branches**


Our history



Quality

Our approach - provide durable products that meet the highest expectations of our buyers by manufacturing our products to the highest standards.



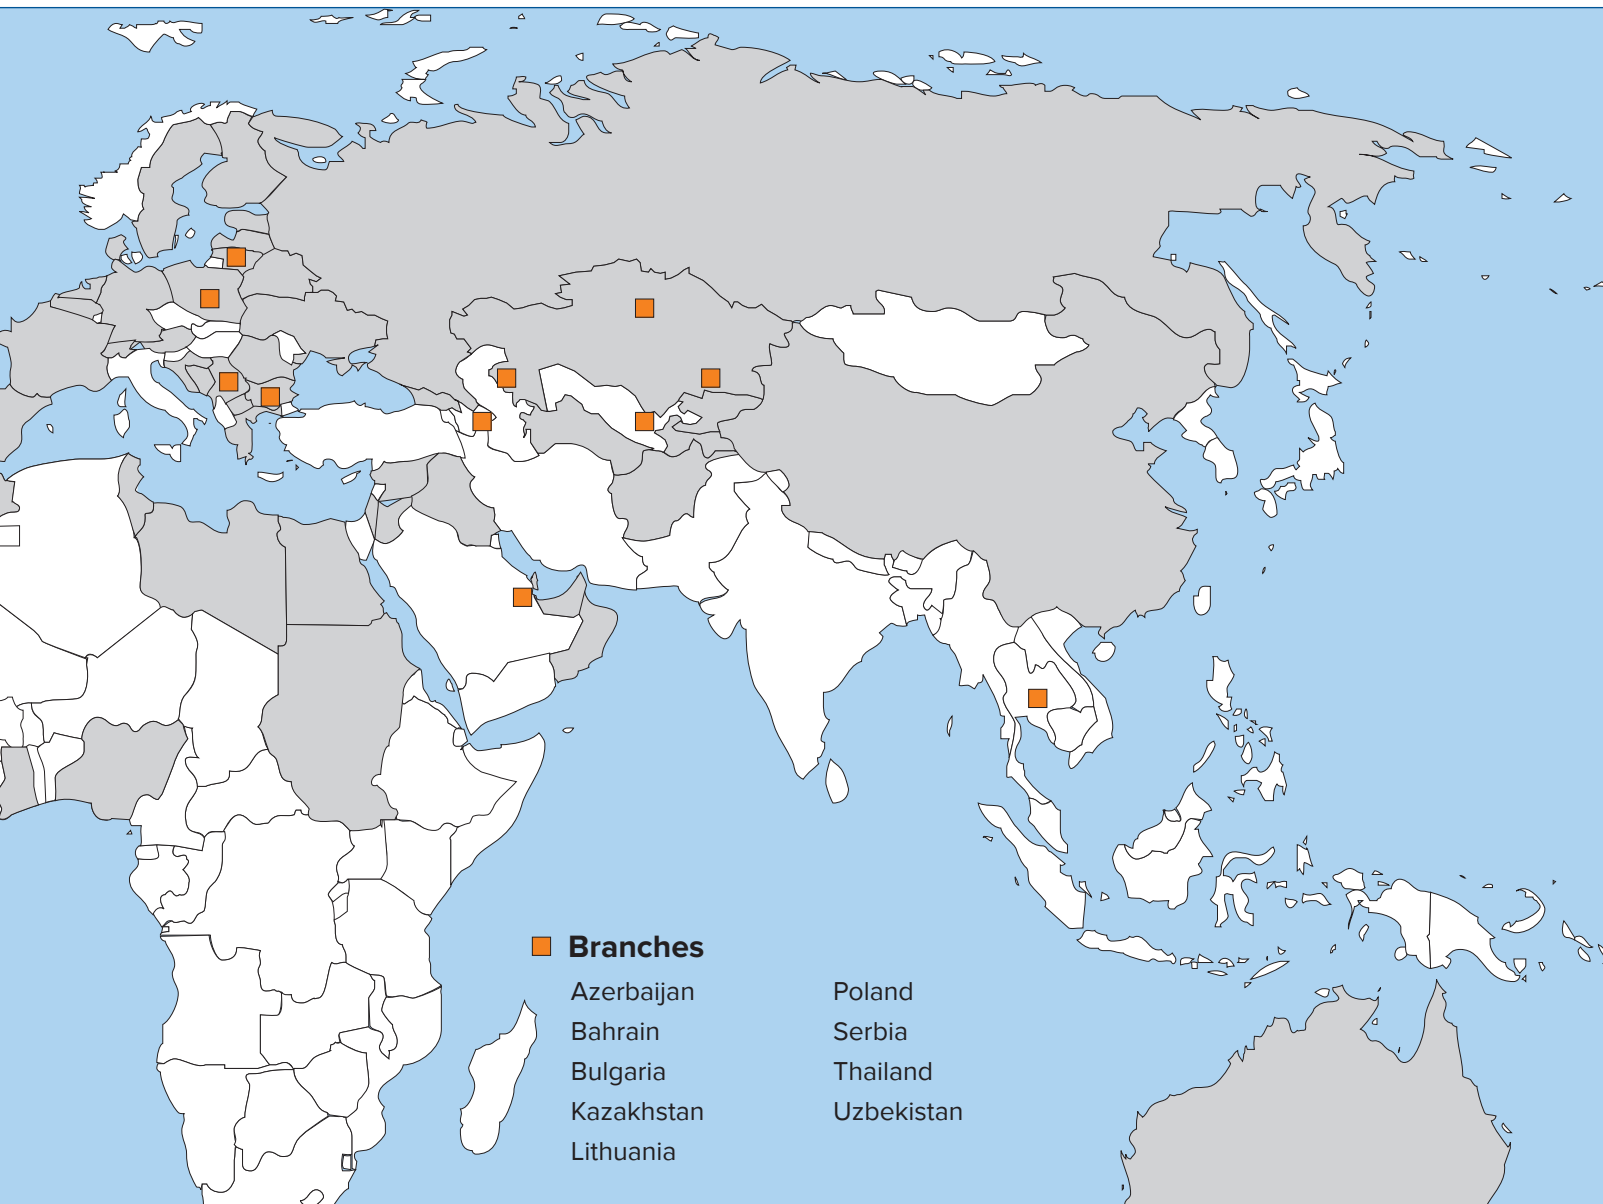

2016

Branches

Establishing our own distribution network in 5 countries.

Manufacturing

Launch of new production facilities.

2023

New Branches

Expansion of our own network in 4 more countries.

2024

Nowadays

Export to 70 countries and 11 own international branches in 9 countries

As of september 2009 our quality managment system is certified to the ISO 9001. One of the leading certification organizations in the world, Det Norske Veritas, is acting as our certifying body.





Manufacturing



Promet is one of the leading safe manufacturers. The plant is located in the European Union, the Republic of Bulgaria.



The production philosophy is based on the management principles of “lean manufacturing”.



The plant implements measures allowing optimized environmental use and minimized environmental pollution resulting from the production.



The plants is equipped with the most advanced metal processing equipment, which is not only sufficiently effective and suitable for production on a large scale, but also flexible and adjustable for manufacturing of a wide range of items and switching quickly among various production types.



Equipment

■ Automatic punching lines
PIVATIC, DALAN


■ Laser cutting systems
AMADA, GWEIKE

■ Punch presses
AMADA

■ Bending machines
AMADA, SAFAN

■ Welding
AMADA, KEMPPI, MOTOMAN

■ Powder coating
GEMA

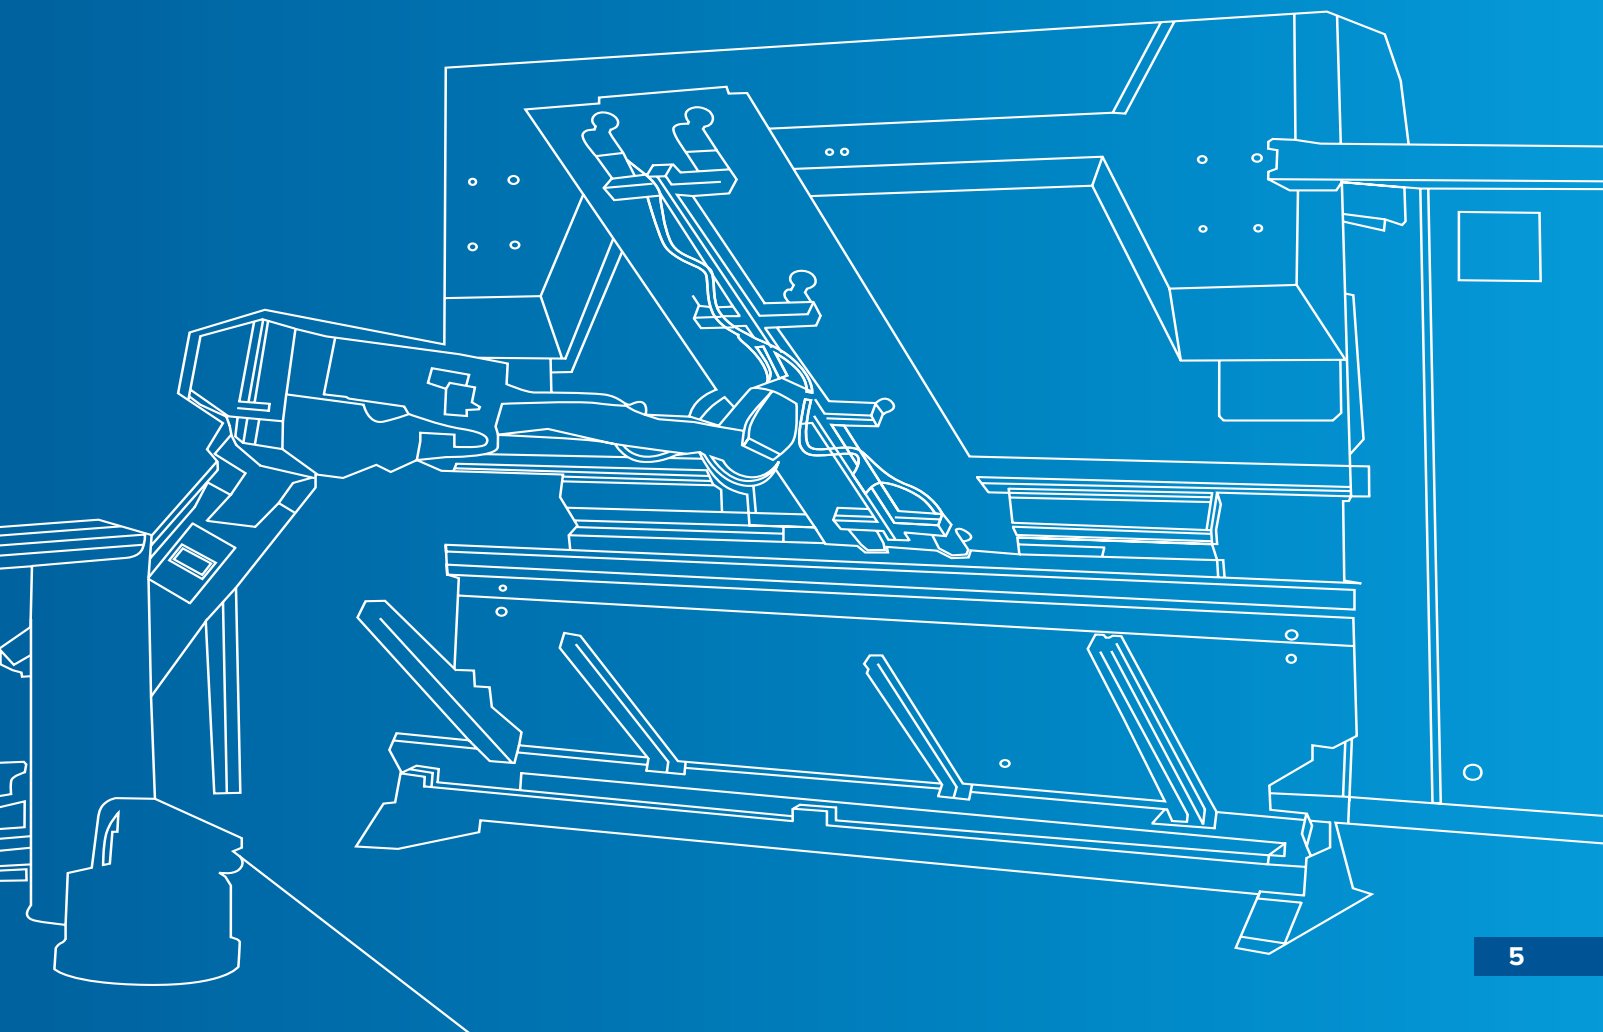

COMMERCIAL SAFES



Commercial Safes

series: **Granit**

grade: **I, LFS 30**

VALBERG

YOU GOT MORE

laser
cut
effect

MULTI
LAYER SYSTEM

GRADE I
ECB-S
certified

LFS 30
ECB-S
certified



GRANIT 90



GRANIT 65

Model										
Granit 3450	340	500	345	262	424	216	1	6	94	24
Granit 4450	440	500	432	362	424	302	1	6	128	46
Granit 46	460	440	430	382	364	300	1	4	118	42
Granit 5450	540	500	432	462	424	302	1	6	149	59
Granit 6465	639	650	550	550	574	420	2	8	233	135
Granit 65	655	440	430	574	364	300	1	6	158	63
Granit 8465	840	650	550	782	574	420	2	8	284	189
Granit 90	900	440	430	822	364	300	2	6	205	90
Granit 1065*	1041	650	554	963	574	424	2	9	345	234
Granit 1265*	1241	650	554	1163	574	424	2	10	426	283



Key lock
Kaba 7111



Digital lock
Grade B (PS-610)

The outer depth is given without the handle and the lock.


* Grade 1 only (no certified fire protection)




GRANIT
3450




GRANIT
4450 EL




GRANIT
46




GRANIT
5450 EL




GRANIT
6465




GRANIT
65 EL




GRANIT
8465



GRANIT
90 EL



GRANIT
1065




GRANIT
1265 EL

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 30 according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with concrete.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Commercial Safes

series: **Garant**
grade: **I, LFS 60**

VALBERG



YOU GOT MORE



GARANT 67



GARANT 46

Model										
Garant 46	490	480	455	330	332	295	1	8	100	33
Garant 67	670	480	455	510	332	295	1	8	130	49
Garant 75	750	555	547	590	407	388	1	9	179	93
Garant 95	980	545	455	820	400	295	1	9	191	94
Garant 110	1100	555	547	940	407	388	2	10	246	148
Garant 133	1336	701	580	1142	527	388	2	10	373	233
Garant 165	1652	701	580	1459	527	382	3	11	451	298




Key lock
Kaba 71111



Digital lock
Grade B (PS-610)

The outer depth is given without the handle and the lock.

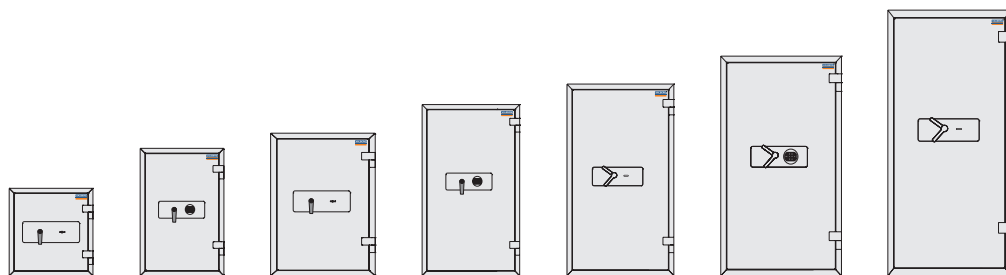

GARANT 46

GARANT 67

GARANT 75

GARANT 95

GARANT 110

GARANT 133

GARANT 165

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 60 according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Thickness of door – 105 mm
- Thickness of walls – 80 mm
- Three way locking bolts. Double vertical bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Innovative solutions for series Garant

series: **Garant**

VALBERG

Dead bolts
on hinge side




Double
vertical bolts



Reinforced
frame.



Multilayered wall
structure, thickness
of 80 mm

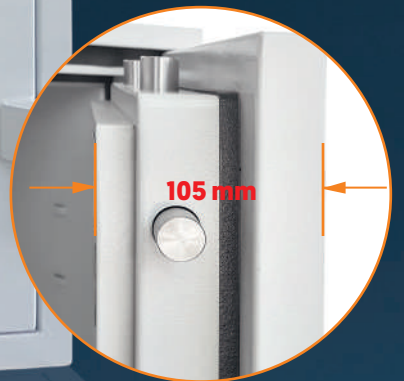

Multilayered door
structure, thickness
of 105 mm




MULTI
LAYER SYSTEM

YOU GOT MORE

Commercial Safes

series: **Bastion M**
grade: **II T2, LFS 30**



BASTION M 46



Model										
Bastion-M 35*	350	440	350	260	350	210	-	7	124	19
Bastion-M 46	460	470	470	333	355	319	1	8	179	38
Bastion-M 50 T2	500	510	510	373	395	359	1	8	211	53
Bastion-M 67 T2	670	510	510	544	395	359	1	8	262	77
Bastion-M 60 T2	610	680	510	483	565	359	1	8	298	98
Bastion-M 80 T2	810	680	510	684	565	359	2	9	368	139
Bastion-M 99 T2	990	510	510	864	395	359	2	9	356	123
Bastion-M 1068 T2	1010	680	510	883	565	359	2	9	439	179
Bastion-M 1368 T2	1320	680	510	1193	565	359	3	10	552	242
Bastion-M 1668 T2	1660	680	510	1533	565	359	4	11	737	311




Key lock
Kaba 7111



Digital lock
Grade B (PS-610)

The outer depth is given without the handle and the lock.

* Grade II only (no certified fire protection)

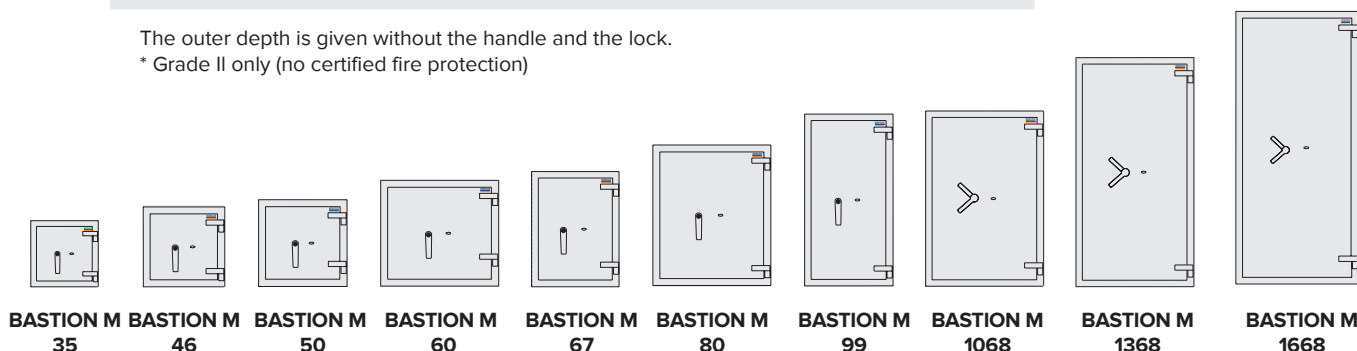

- Burglary resistance – EN 1143-1, Grade II T2.
- Fire resistance – LFS 30 according to EN 15659.
- Thickness of door – 92 mm.
- Thickness of walls – 58 mm.
- Patented, special type of Ultra High Performance Concrete
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).





Fort M Series


Commercial Safes

VALBERG

series: **Fort M**
grade: **III, LFS 30**



FORT M 50



Model										
Fort M 35*	350	440	350	250	340	168	-	7	137	14
Fort M 50	500	510	510	373	395	327	1	8	228	48
Fort M 60	610	680	510	483	565	327	1	8	322	89
Fort M 67	670	510	510	544	395	327	1	8	281	70
Fort M 80	810	680	510	683	565	327	2	9	396	126
Fort M 99	990	510	510	863	395	327	2	9	386	111
Fort M 1068	1010	680	510	883	565	327	2	9	470	163
Fort M 1368	1320	680	510	1193	565	327	3	10	591	220
Fort M 1385	1320	850	510	1173	715	316	3	12	782	265
Fort M 1668	1660	680	510	1513	545	316	4	11	786	261
Fort M 1685	1660	850	510	1513	715	316	4	13	941	342



Key lock
Kaba 70076



Digital lock
Grade B (PS-610)

The outer depth is given without the handle and the lock.


* Grade III only (no certified fire protection)



FORT M 35




FORT M 50



FORT M 60




FORT M 67




FORT M 80




FORT M 99




FORT M 1068



FORT M 1368



FORT M 1385



FORT M 1685



FORT M 1668

- Burglary resistance – EN 1143-1, Grade III.
- Fire resistance – LFS 30 according to EN 15659.
- Thickness of door – 125 mm.
- Thickness of walls – 58 mm.
- Patented, special type of Ultra High Performance Concrete
- Three way locking bolts.
- Integrated relocker with glass plate, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Commercial Safes

series: **Banker M**
grade: **IV, LFS 30**



BANKER M 55

Model										
Banker-M 55	550	550	520	423	435	336	1	12	297	62
Banker-M 67	670	550	520	543	435	336	1	12	364	79
Banker-M 85	840	550	520	713	435	336	1	12	409	104
Banker-M 1055	1010	550	520	883	435	336	2	14	504	129
Banker-M 1255	1200	550	522	1087	436	337	2	14	585	160
Banker-M 1285	1200	850	660	1067	713	467	2	14	974	355
Banker-M 1368	1320	680	550	1187	570	357	3	14	806	242
Banker-M 1568	1510	680	550	1413	545	356	3	14	854	274




Key lock
Kaba 70076 +
Kaba 70076



Key lock+Digital lock
Kaba 70076 +
Grade B (PS-610)


The outer depth is given without the handle and the lock.

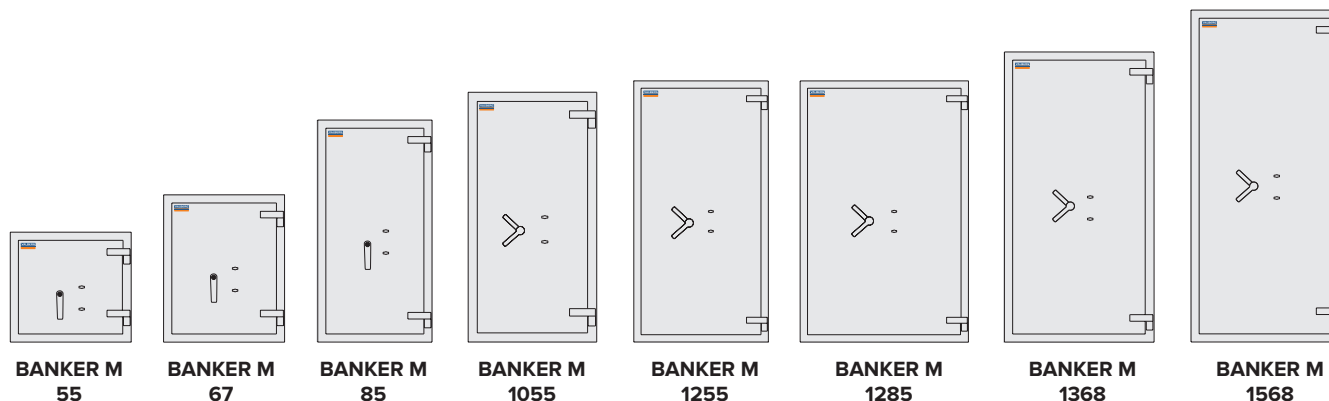

- Burglary resistance – EN 1143-1, Grade IV.
- Fire resistance – LFS 30 according to EN 15659.
- Thickness of door – 125 mm.
- Thickness of walls – 58 mm.
- Patented, special type of Ultra High Performance Concrete
- Integrated relocker with glass plate, lock secured from drill attacks.
- Three way locking bolts.
- Standard delivery with 2 double-bit high security key locks with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Commercial Safes

series: **Burgas**
grade: **V, LFS 30**



BURGAS 67



Model										
Burgas 67	680	680	630	540	540	382	1	12	571	111
Burgas 85	840	680	680	700	540	432	1	12	700	163
Burgas 1061	1010	680	680	870	540	432	2	12	815	203
Burgas 1361	1320	680	680	1180	540	432	3	14	1019	275
Burgas 1561	1510	680	680	1370	540	432	3	14	1144	319
Burgas 1579	1510	680	779	1370	540	531	3	14	1533	392




Key lock
Kaba 70076 +
Kaba 70076




Key lock+Digital lock
Kaba 70076 +
Grade B (PS-610)


The outer depth is given without the handle and the lock.




BURGAS 67




BURGAS 85



BURGAS 1061



BURGAS 1361



BURGAS 1561

- Burglary resistance – EN 1143-1, Grade V.
- Fire resistance – LFS 30 according to EN 15659.
- Thickness of door – 166 mm.
- Thickness of walls – 70 mm.
- Integrated relockers with glass plate, lock secured from drill attacks.
- Three way locking bolts.
- Standard delivery with 2 double-bit high security key locks with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

PRIVATE SAFES



Private Safes

series: **BS**

grade: **S1**

VALBERG



MULTI
LAYER SYSTEM



BS 800



BS 300

Model										
BS-220	220	350	300	140	270	196	1	4	14	7
BS-300	300	445	400	220	365	296	1	4	23	24
BS-350	350	450	350	270	370	246	1	4	24	25
BS-3035	300	350	300	220	271	196	1	4	16	12
BS-450	450	445	400	370	365	296	1	4	29	40
BS-550	550	450	350	470	370	246	1	4	33	43
BS-555	510	550	505	430	470	396	3	6	44	80
BS-600	600	445	400	520	365	296	1	4	35	57
BS-800	800	445	400	720	365	296	2	6	45	78
BS-1000	1000	445	400	920	365	296	2	6	54	99



Key lock
Kaba 74046



Digital lock
Grade B (PS-310)

The outer depth is given without the handle and the lock.



- Burglary resistance – S1 according to EN 14450.
- Thickness of door – 30 mm.
- Double-wall construction.
- Three way locking bolts.
- Lock secured from drill attacks.

- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).


Private Safes

series: **SB**
grade: **S2**

VALBERG



MULTI
LAYER SYSTEM

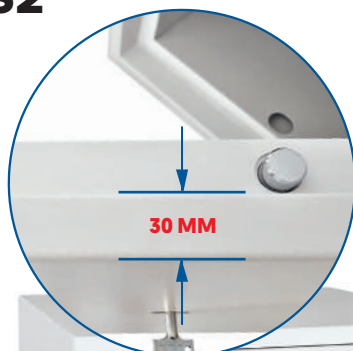

SB 300



SB 450

Model										
SB 220	220	350	300	140	270	196	1	4	14	7
SB 290	290	350	290	210	271	190	1	4	20	11
SB 300	300	445	400	220	365	296	1	4	28	24
SB 3035	300	350	300	220	271	196	2	4	19	12
SB 350	350	450	350	270	370	246	1	4	29	25
SB 450	450	445	400	370	365	296	1	4	31	40
SB 550	550	450	350	470	370	246	1	4	34	43
SB 555	510	550	505	430	470	396	3	6	47	80
SB 600	600	445	400	520	365	296	1	4	30	56
SB 800	800	445	400	720	365	296	2	6	60	78
SB 1000	1000	445	400	920	365	296	2	6	65	99




Key lock
Kaba 74046



Digital lock
Grade B (PS-310)

The outer depth is given without the handle and the lock.

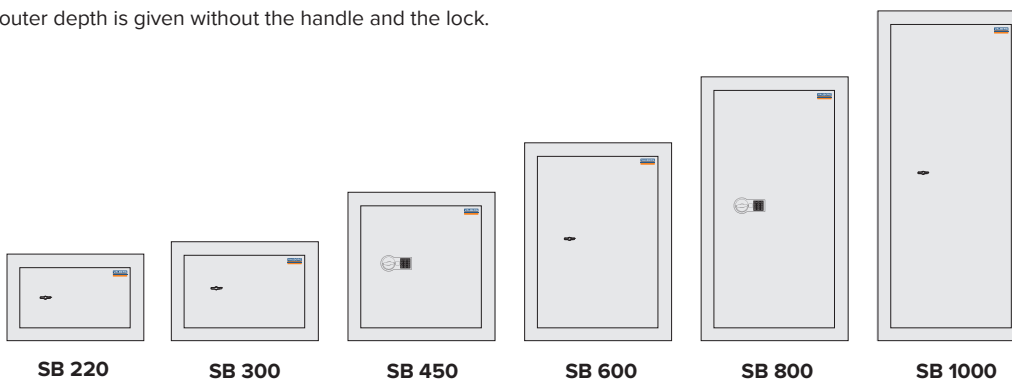

- Burglary resistance – S2 according to EN 14450.
- Thickness of door – 30 mm.
- Double-wall construction.
- Three way locking bolts.
- Lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Private Safes

series: **BRF**

grade: **S2, LFS 30**

VALBERG

YOU GOT MORE



BRF 46




BRF 32

Model										
BRF-30	300	427	384	170	316	235	1	4	43	13
BRF-32	315	445	449	185	335	300	1	4	51	19
BRF-46	460	440	449	330	330	300	1	4	71	32
BRF-49	490	360	449	360	249	300	1	4	59	27
BRF-67	670	440	449	540	330	300	1	4	85	53
BRF-95	950	440	449	822	330	300	2	6	114	81


The outer depth is given without the handle and the lock.



Key lock
Kaba 74046




Digital lock
Grade B (PS-310)




BRF-30




BRF-32



BRF-46



BRF-49



BRF-67



BRF-95

- Burglary resistance – S2 according to EN 14450.
- Fire resistance – LFS 30 according to EN 15659.
- Thickness of door - 95 mm.
- Thickness of walls - 55 mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Innovative solutions for series BRF

series: **BRF**

VALBERG



Dead bolts
on hinge side



Multilayered wall
structure, thickness
of 55 mm



Vertical bolts



Thickness
of door 95 mm




MULTI
LAYER SYSTEM

YOU  **GOT MORE**

Private Safes


series: **FRS S2**

grade: **S2, LFS 60**




FRS S2 30 EL

Model										
FRS S2 30	296	430	365	188	326	236	tray	-	31	15
FRS S2 32	315	445	425	207	341	296	tray	-	38	21
FRS S2 49	490	361	425	382	257	296	1+tray	-	46	29
FRS S2 51	510	445	425	402	341	296	1+tray	-	54	41
FRS S2 66	653	485	450	467	346	301	1	85x343	75	49
FRS S2 67T	713	485	450	527	346	301	1	85x343	86	49
FRS S2 75T	792	485	450	607	346	301	1	85x343	103	64/8
FRS S2 93T	972	565	450	786	426	301	2	85x423	138	98/10
FRS S2 120T	1255	711	580	1034	546	418	2	135x515	290	236/26
FRS S2 133T	1391	711	580	1170	546	418	2	135x515	332	267/26
FRS S2 165T	1708	711	580	1487	546	418	3	135x515	390	340/26



Digital lock
Grade B (PS-310)

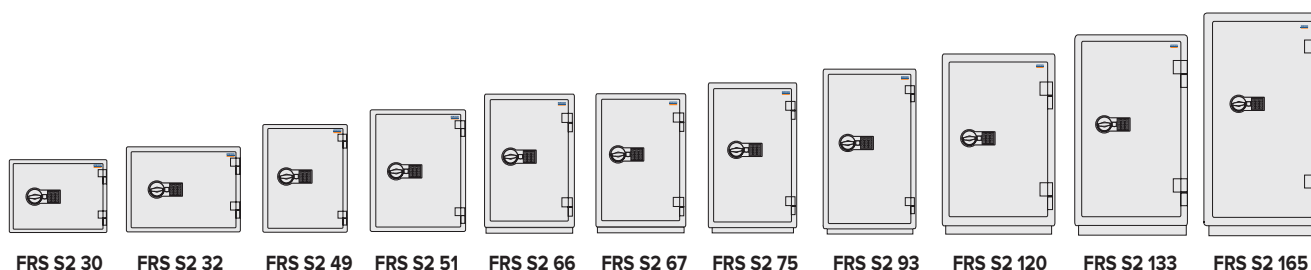

- Burglary resistance – S2 according to EN 14450.
- Fire resistance – LFS 60 according to EN 15659.
- Thickness of door - 95 mm, 117 mm.
- Thickness of walls - 50 mm, 70 mm, 80 mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Pull out tray or drawer included.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Innovative solutions for series FRS S2


series: **FRS S2**



Pull out tray



Pull out drawer

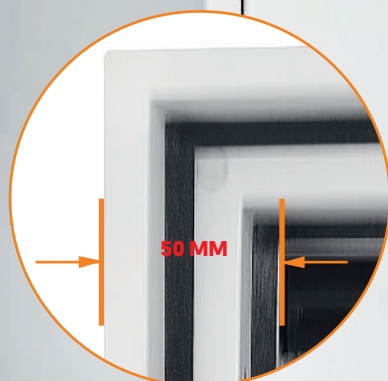

Multilayered wall
structure, thickness
of 50 mm



Thickness
of door
95 mm




YOU ✓ GOT MORE

Private Safes

series: **FSB**

grade: **S2, LFS 60**

VALBERG



FSB 46



FSB 32

Model										
FSB 32	345	480	459	185	332	300	1	4	63	18
FSB 46	490	480	457	330	332	300	1	4	80	33
FSB 67	670	480	459	510	332	300	1	4	102	51




Key lock
Kaba 74046




Digital lock
Grade B (PS-310)


The outer depth is given without the handle and the lock.



FSB 32



FSB 46



FSB 67

- Burglary resistance – S2 according to EN 14450.
- Fire resistance – LFS 60 according to EN 15659.
- Thickness of door – 105 mm.
- Thickness of walls – 77 mm.
- Thickness of rear wall – 51 mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.

- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Private Safes

series: **RS2**

grade: **S2**

VALBERG



RS2 51

RS2 32

Model										
RS2 30	290	405	355	190	305	216	1	4	40	12
RS2 32	305	430	430	205	330	295	1	4	49	20
RS2 36	350	480	430	250	380	295	1	4	59	28
RS2 49	480	350	430	380	295	250	1+1	4	60	28
RS2 51	480	430	430	380	330	295	1+1	4	66	37




Key lock
Kaba 74046




Digital lock
Grade B (PS-310)


The outer depth is given without the handle and the lock.




RS2 30



RS2 32



RS2 36



RS2 51

- Burglary resistance – S2 according to EN 14450.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Pull out tray included
- Integrated relocker, lock secured from drill attacks.
- Three way locking bolts.
- Modern design
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Series RS2

series: **RS2**

VALBERG

New



mm Laser
ut
Effect

MULTI
LAYER SYSTEM

YOU GOT MORE

Private Safes

series: **Barrier**

grade: **0, LFS 30**


VALBERG



MULTI
LAYER SYSTEM




BARRIER 46

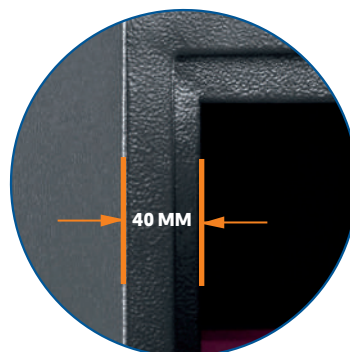

Model												
Barrier 3040*	300	400	300	214	321	165	1	4	65	11		
Barrier 3045*	300	450	400	214	371	266	1	4	87	21		
Barrier 45*	450	450	400	364	371	259	1	4	118	34		
Barrier 3450*	340	500	300	254	421	159	1	4	87	17		
Barrier 46	460	440	380	374	361	239	1	4	113	32		
Barrier 67	670	440	380	584	361	239	2	4	153	50		
Barrier 8465	840	650	550	754	570	408	1	4	211	175		
Barrier 90	900	440	380	814	361	239	2	6	196	70		
Barrier 1265	1240	650	550	1154	570	408	3	6	429	268		



Key lock
Kaba 74046




Digital lock
Grade B (PS-310)

The outer depth is given without the handle and the lock.

Certified Fire Protection


* Digital lock only.



BARRIER 3040




BARRIER 3045




BARRIER 45




BARRIER 3450



BARRIER 46




BARRIER 67



BARRIER 8465



BARRIER 90



BARRIER 1265

- Burglary resistance – EN 1143-1, Grade 0.
- Fire resistance – LFS 30 according to EN 15659, (Barrier 3040, Barrier 3045, Barrier 45).
- Thickness of door – 90 mm (Barrier 3040, Barrier 3045, Barrier 45), 96 mm (all other sizes).
- Thickness of walls – 40 mm.
- Double-wall construction.

- Three way locking bolts.
- Lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Private Safes

series: **ASK**

grade: **I**

VALBERG



ASK 90T




ASK 46

Model										
ASK - 20*	200	260	180	138	212	100	1	4	21	3
ASK - 25	250	360	310	194	312	228	1	4	43	14
ASK - 30	300	440	380	244	392	298	1	4	65	29
ASK - 46	460	440	380	404	392	298	1	4	90	48
ASK - 67T	670	440	380	484	392	298	1	4	122	56/15
ASK - 90T	900	440	380	714	392	298	1	6	154	84/15



Key lock
Kaba 74046



Digital lock
Grade B (PS-310)

The outer depth is given without the handle and the lock.


* No electronic lock available.




ASK 20




ASK 25




ASK 30



ASK 46



ASK 67T





ASK 90T

- Burglary resistance – EN 1143-1, Grade I.
- Increased resistance to drilling by using the front casing from solid steel - 10mm.
- Thickness of walls - 24mm.
- Three way locking bolts.
- Curved shape door vault.
- Lock secured from drill attacks.
- Multilayered wall construction.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall (except ASK 67 and ASK 90)
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Innovative solutions for series ASK

VALBERG


Thanks to the laser, it is possible to achieve the arched shape of the door vault. The most vulnerable place of the safe, the first to be exposed by the thief is the place where the door is connected to the body. The rounded shape of the door makes it difficult to effectively undermine the frame with a crowbar or other mechanical tool.

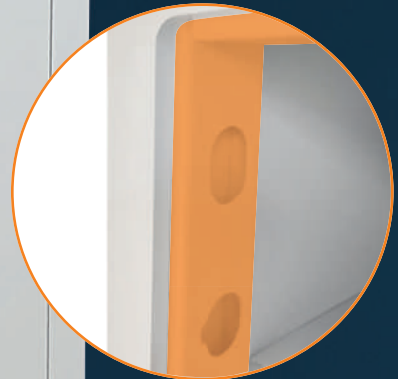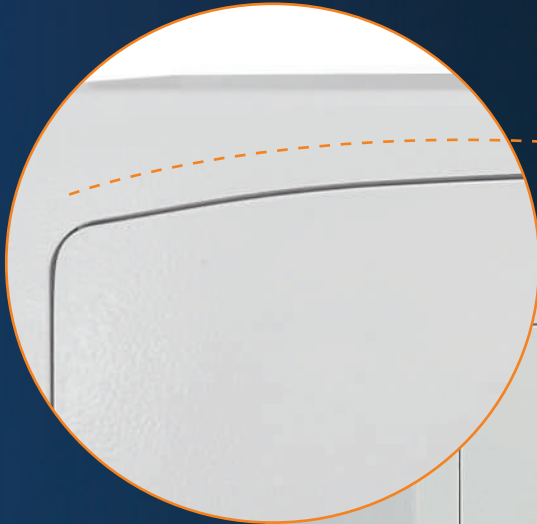

Reinforced frame.



Three way locking bolts.

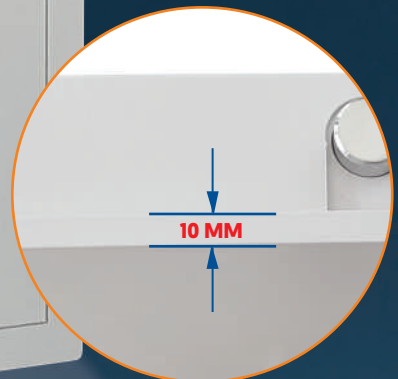

Increased resistance to drilling through the use of the front shell from solid steel 10 mm

Laser
Cut
Effect

YOU GOT MORE

Private Safes

series: **CBS**

VALBERG

YOU GOT MORE



CBS 80

Model										
CBS - 50	500	500	500	360	360	286	1	6	215	37
CBS - 65	650	500	500	510	360	286	1	6	263	52
CBS - 80	800	600	550	660	460	336	1	8	375	102
CBS - 100	1000	600	550	860	460	336	1	9	455	133
CBS - 130	1300	600	600	1160	460	387	3	11	582	206
CBS - 160	1600	700	600	1560	560	387	3	12	810	338
CBS - 180	1800	700	700	1660	560	487	3	13	985	452




Key lock
Kaba 71111




Digital lock
Grade B (PS-610)


The outer depth is given without the handle and the lock.




CBS 50



CBS 65



CBS 80




CBS 100

- The safe body and the door are manufactured with two inter-welded walls that are filled with strong heavy concrete.
- Thickness of the body 70 mm and the door – 140 mm.
- Fitted with high security locks
- High security boltwork with glass
- Three way locking bolts
- The door has locking bolts which diameter is 38mm
- Integrated relocker, lock secured from drill attacks
- 4 anchoring holes in the bottom + 4 anchoring holes in the back wall

Innovative solutions for series CBS

VALBERG

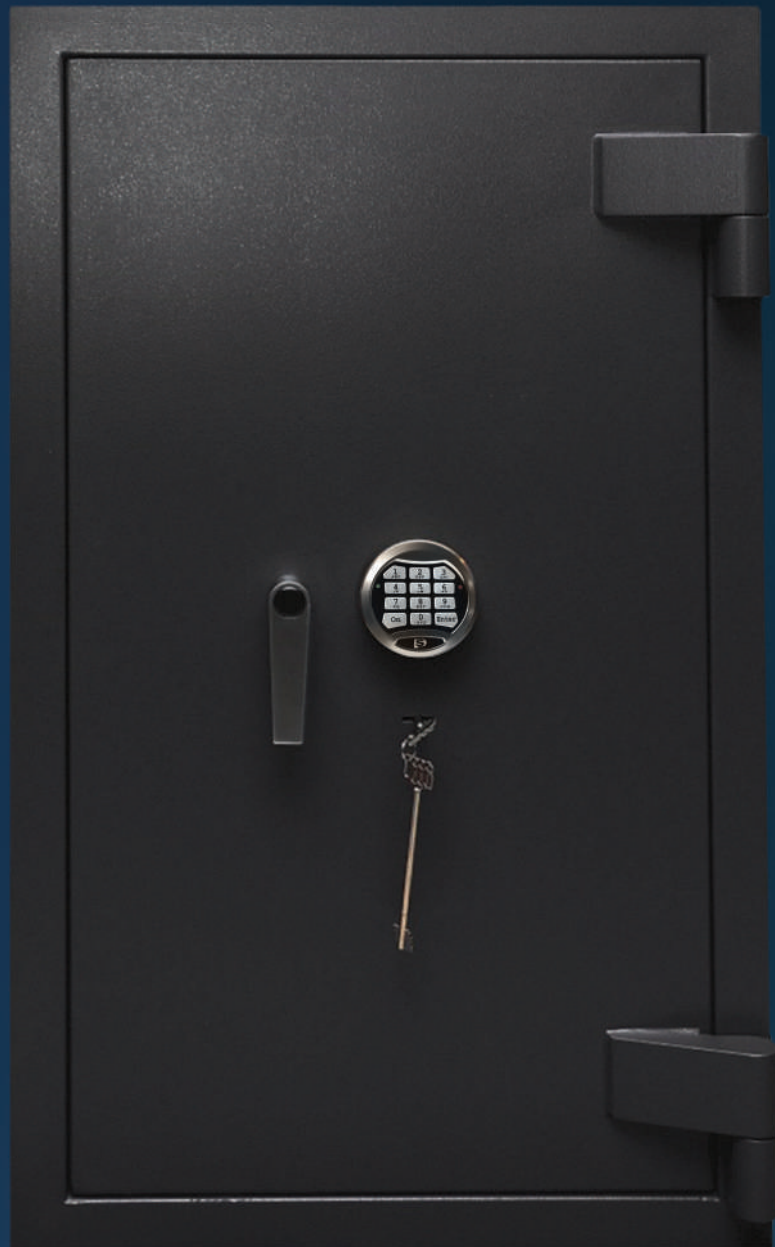

DOUBLE DOOR SAFES



Double door Safes

series: **Brandmauer**
grade: **S2**

YOU GOT MORE

aser
ut
ffect

MULTI
LAYER SYSTEM

FACTORY
30
minutes
TESTED

SITB
S2



BM 1951



Model									
BM 1260	1220	600	520	1082	506	420	2	71	211
BM 1220	1220	930	520	1050	820	405	2	80	349
BM 1993	1950	930	520	1800	820	420	4	142	638
BM 1951	1950	1250	520	1800	1140	405	4	180	822




Key lock
Kaba 71111




Digital lock
Grade B (PS-610)


The outer depth is given without the handle and the lock.




BM 1260



BM 1220



BM 1993



BM 1951

- Double wall construction, the gap between the inner and outer walls is filled with heat insulating material which protects the contents from fire.
- Door opening angle up to 180 degrees due to external hinges.
- Accessories: Inner compartment, telescopic shelf, telescopic frame.
- Three point locking mechanism, 5 bolts 20 mm in diameter.
- Thickness of door – 60mm.
- Standard delivery with double-bit high security key lock with two keys + handle.
- Maximal shelf load – 40 kg
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Double door Safes

series: **FSB**

grade: **S2, LFS 60**

YOU GOT MORE



MULTI
LOCK SYSTEM



FSB 1993



Model										
FSB 12130	1200	1312	585	1030	1110	390	2	7	394	445
FSB 19130	1950	1312	585	1785	1110	390	4	9	706	773
FSB 1993	1950	940	628	1760	801	392	4	9	558	553



Key lock
Kaba 7111




Digital lock
Grade B (PS-610)


The outer depth is given without the handle and the lock.



FSB 12130



FSB 1993




FSB 19130

- Burglary resistance – S2 according to EN 14450.
- Fire resistance – LFS 60 according to EN 15659.
- Thickness of door - 125 mm.
- Thickness of walls - 70 mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Maximal shelf load – 50 kg
- Three way locking bolts.
- Accessories: Inner compartment, telescopic shelf, telescopic frame.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Double door Safes

series: **Garant**
grade: **I, LFS 60**



YOU GOT MORE



GARANT 1993

Model										
Garant 1993	1950	940	585	1760	801	392	4	13	659	553


The outer depth is given without the handle and the lock.



Key lock
Kaba 71111



Digital lock
Grade B (PS-610)



GARANT 1993

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 60 according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Thickness of door – 125 mm
- Thickness of walls – 70 mm
- Accessories: Inner compartment, telescopic shelf, telescopic frame.
- Three way locking bolts. Double vertical bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Maximal shelf load – 50 kg
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

DEPOSIT SAFES



Deposit Safes

series: **ASD**

grade: **S1**

VALBERG



ASD 19 EL




ASD 32 EL

Model												
ASD 19	489	341	370	475	335	308	210x100x55	35	50			
ASD 32	812	417	399	798	407	330	288x100x55	70	155			



Key lock
Kaba 74046




Digital lock
Grade B (PS-310)

The outer depth is given without the handle and the lock.



ASD 19



ASD 32

- Burglary resistance – Security Level S1 according to EN 14450.
- Doors secured with solid steel plate.
- Single wall body.
- Three way locking bolts.
- Anti-fishing protection.
- Standard delivery with double-bit high security key lock with two keys.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Deposit Safes

series: **DSC**

grade: **DI**

VALBERG



MULTI
LAYER SYSTEM



DSC 67



DSC 67

Model											
DSC 65	670	440	550	448	364	423	104-308-124	1	6	187	69/4
DSC 67	670	650	550	455	573	423	104-517-124	-	6	277	100/7
DSC 80	840	650	550	616	573	423	104-517-124	1	8	327	149/7
DSC 100	1040	650	550	816	573	423	104-517-124	2	9	385	198/7
DSC 120	1240	650	550	1016	573	423	104-517-124	2	10	437	246/7




Key lock
Kaba 7111




Digital lock
Grade B (PS-610)


The outer depth is given without the handle and the lock.




DSC 65




DSC 67



DSC 80



DSC 100



DSC 120

- Burglary resistance – D-I grade (EN 1143-2, ECB-S).
- Thickness of door – 85 mm.
- Thickness of walls – 40 mm.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Possible to equip the deposit drawer with grade B electronic lock.

- Drawer closed bolt system
- Standard delivery with double-bit high security key lock with two keys.
- Anti-fishing device.
- Anchoring to the floor - 4 holes.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Innovative solutions for series DSC

series: **DSC**

VALBERG



Anti-fishing
system

Reinforced
with bolts



MULTI
LAYER SYSTEM

Deposit Cabinets

series: **DT**

VALBERG



DT-1x04 DGL



DT-1x08 M



DT-1x12 DGL









DT-1x15 M




DT-1x17 DGL




DT-1x20 M

Model						Number of drawer	Height of drawer (mm) /Number of drawer										
	50	75	100	125	150		175	200	300	450	600						
DT-1x04 DGL/DT-1x04 M	2030	310	442	288	400	8	—	—	2	—	—	—	3	2	1	—	100.5
DT-1x07 DGL/DT-1x07 M						7	—	—	2	—	3	—	—	—	—	2	98.5
DT-1x08 DGL/DT-1x08 M						7	—	—	2	—	2	—	—	1	1	1	98.5
DT-1x12 DGL/DT-1x12 M						25	18	3	—	2	—	1	—	1	—	—	132
DT-1x13 DGL/DT-1x13 M						21	7	7	5	—	—	1	—	1	—	—	124
DT-1x14 DGL/DT-1x14 M						19	1	—	18	—	—	—	—	—	—	—	120
DT-1x15 DGL/DT-1x15 M						7	1	—	—	—	—	—	—	6	—	—	98.5
DT-1x17 DGL/DT-1x17 M						22	—	20	—	—	—	2	—	—	—	—	126.5
DT-1x20 DGL/DT-1x20 M						21	10	7	—	—	—	3	—	1	—	—	124

Finishing variants



DTxxS
Stainless steel





DTxx
Aluminium


Deposit Cabinets

series: **DT**


VALBERG

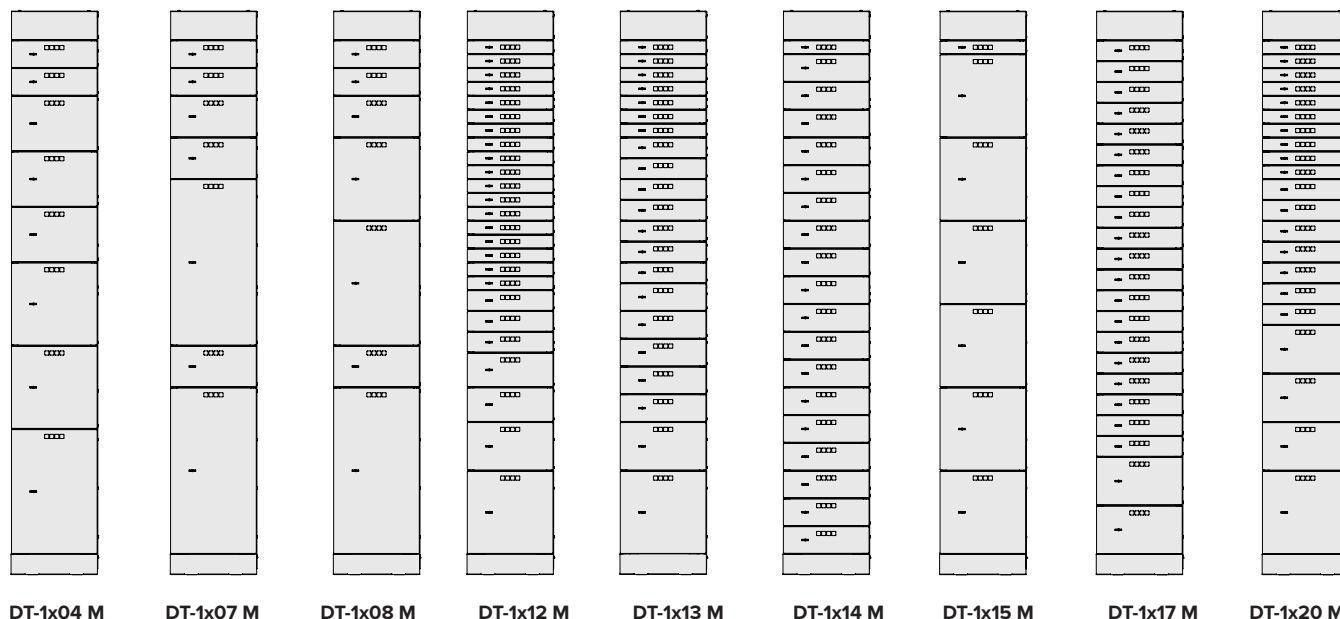


Case for
drawer
50




Case for
drawer
75




Case for
drawer
100



Case for
drawer
150



Case for
drawer
200



Case for
drawer
400


- Designed as a set of deposit columns equipped with drawers of different sizes depending on the customer's needs.
- The frame made of high-quality steel.
- The thickness of the front panel of the drawers – 5mm.
- Specified by customer order of numbering the drawers.
- Available as option: completing the drawers with metal cases and with sealing device.

- Configuration options:
- DT equipment: two-key locks (bank + client) with one keyhole; KABA MAUER lock with reconfigurable lock.
- DT/DGL equipment: two-key locks (bank + client) – two keyholes with a reconfigurable bank lock.

Deposit Safes

series: **DB**


VALBERG

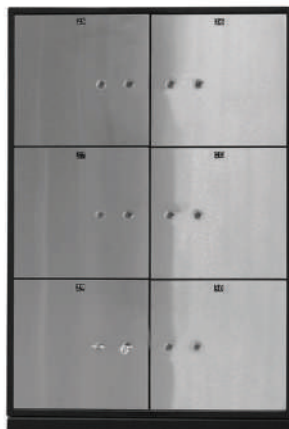


Model							Number of drawer	KG
DB 24	920	635	430	72	260	390	24	126 /132
DB 12	920	635	430	146	260	390	12	98/103
DB 8	920	635	430	220	260	390	8	88/94
DB 6	920	635	430	294	260	390	6	84/88
DB 6/3	920	635	430	146/220/516	260	390	2/2/2	84/88
DB 4	920	635	430	442	260	390	4	73/78
DB 2	920	635	430	886	260	390	2	68/73

Accessories				Material
Pedestal DB-P	—	—	—	Steel
Frontal Frieze DB-F	100	635	430	Steel
Pullout Table DB-T	52	635	430	Steel
Deposit Cassette H-50 (k DB-24)	50	210	355	Steel
Deposit Cassette H-140 (k DB-12)	140	210	355	Steel
Deposit Cassette H-200 (k DB-8)	200	210	325	Steel
Deposit Box DB-65 (k DB-24)	65	255	375	Plastic
Deposit Box DB-135 (k DB-12)	135	255	375	Plastic
Deposit Box DB-210 (k DB-8)	210	255	375	Plastic


* Specification DGL




DB 24




DB 12




DB 8




DB 6



DB 6/3



DB 4



DB 2

- Designed for bank vaults and hotel storage rooms.
- Front panel thickness – 3mm.
- Plastic numbering supplied.
- Numbering scheme is specified by customer when placing order.
- Optional steel cassettes with sealing mechanisms can be supplied
- Made to order
- Available specification:
 - DBxx – Painted doors, one key hole for two keys KABA MAUER (bank and client), bank lock can be reconfigured.
 - DBxxS – Doors with additional stainless steel panels, one key hole for two keys KABA MAUER (bank and client), bank lock can be reconfigured.
 - DBxxDGL – Painted doors, two key holes for two keys (bank and client).
 - DBxxS.DGL – Doors with additional stainless steel panels, two key holes for two keys (bank and client).
- Colour: Deposit block – RAL 9005, doors – grey paint or stainless steel panels.

GUN SAFES



Gun Safes

series: **Arsenal**
grade: **S1**

VALBERG



ARSENAL 1433



Equipped
with an inner
compartment



Solid body and
door construction
provides high resistance
for cutting




ARSENAL 1253




Model										
Arsenal 1253	1250	545	345	1244	539	295	240-200-245	1000	6	78
Arsenal 1423	1450	210	280	1444	204	230	145-204-195	1295	3	41
Arsenal 1433	1450	260	350	1444	249	295	145-249-265	1295	5	55
Arsenal 1443	1450	380	350	1444	369	295	145-369-265	1295	7	66




Key lock
Kaba 74046



Digital lock
Grade B (PS 310)



ARSENAL 1253



ARSENAL 1423



ARSENAL 1433



ARSENAL 1443

Gun Safes

series: **Arsenal**
grade: **S1**

VALBERG



ARSENAL 63T EL

Inner compartment




ARSENAL 25

Model									
Arsenal 25	250	340	280	244	334	224	1	15	19
Arsenal 30	300	440	355	294	434	301	1	23	39
Arsenal 46	460	440	355	454	434	301	1	27	60
Arsenal 63T	630	440	355	500	434	301	1	40	66/13
Arsenal 90T	900	440	355	770	434	301	1	54	101/13
Arsenal 120T	1200	440	355	1070	434	301	2	64	132/13
Arsenal 120T/2	1200	440	355	449 612	434	301	1	71	58+80/13



Key lock
Kaba 74046




Digital lock
Grade B (PS 310)




ARSENAL 25




ARSENAL 30




ARSENAL 46




ARSENAL 63T



ARSENAL 90T



ARSENAL 120T



ARSENAL 120T/2

- Burglary resistance – EN 14450, Security Level S1.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Gun Safes

series: **ASG/WS**
grade: **I, LFS 30**

VALBERG

YOU GOT MORE

ASER
ut
FFECT


SITB
GRADE I

SITB
LFS 30



Inner compartment
as an option

ASG/WS5



Model										
ASG/WS3*	1345	310	375	1240	205	244	1215	3	6	108
ASG/WS5	1515	400	385	1400	285	232	1273	5	7	160
ASG/WS6	1650	460	450	1530	340	300	1336	6	7	205
ASG/WS8	1650	570	450	1530	450	300	1336	8	7	235
ASG/Combi	1650	850	450	1530	730	300	1336	5/5	9	325
ASG/WS14	1650	880	450	1530	760	300	1336	14	9	325



Key lock
Kaba 71111



Digital lock
Grade B (PS-610)

The outer depth is given without the handle and the lock.


* Grade 1 only (no certified fire protection)




ASG/WS3




ASG/WS5




ASG/WS6



ASG/WS8



ASG/COMBI



ASG/WS14

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 30 according to EN 15659.
- Thickness of door 95 mm, thickness of walls 55 mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor or to the wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite)..

Gun Safes

series: **WSL**
grade: **I**

VALBERG

YOU GOT MORE

Laser
Cut
Effect

MULTI
LAYER SYSTEM

SITB
GRADE I

Feel Safe

New



WSL 5



WSL 3

Model										
WSL 3	1300	255	320	1247	200	243	-	3	6	78
WSL 5	1450	340	320	1397	285	243	-	5	6	100
WSL 6	1586	395	375	1536	340	298	-	6	6	128
WSL 8	1586	505	375	1536	450	295	-	8	6	150
WSL Combi	1586	785	375	1536	730	295	1342	5/5	6	219
WSL 14	1586	815	375	1536	760	295	-	14	6	208



Key lock
Kaba 71111



Digital lock
Grade B (PS-610)

The outer depth is given without the handle and the lock.



WSL 3




WSL 5




WSL 6



WSL 8



WSL COMBI



WSL 14

- Burglary resistance – EN 1143-1, Grade I.
- Thickness of door 50 mm, thickness of walls 27 mm.
- The safe body and door are manufactured with two inter-welded walls.
- Three way locking bolts.

- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor or to the wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

FIRE RESISTANT PRODUCTS



Fire Resistant Filing Cabinets

VALBERG

series: **FC**

grade: **LFS 60**



MULTI
LAYER SYSTEM



FC 4K-NN



Optional wheels available



FC 2K-NN



Model								
FC 1	487	480	653	250	326	512	1	65
FC 2	825	545	653	250	390	500	2	110
FC 3	1163	545	653	250	390	500	3	149
FC 4	1500	545	653	250	390	500	4	208



Key lock




Digital lock



Combination lock

The outer depth is given without the handle and the lock.

The outer height is given with wheels. The height with wheels is +20 mm

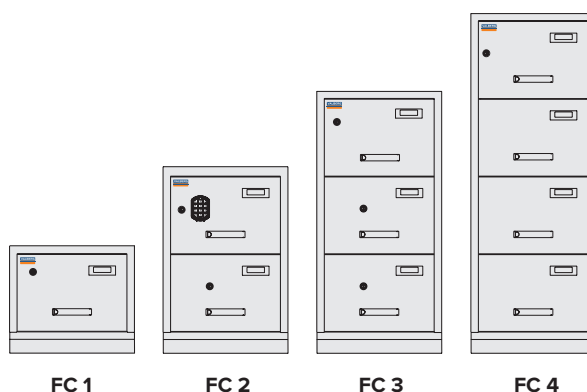

- Fire resistance – 1 hour LFS 60 according to EN 15659.
- Drawer capacity – 50 kg.
- Drawers adjustable for A4 and Foolscap files.
- Electrostatic powder coating is applied to all sides including the bottom. The finish is scratch-resistant providing a lifetime quality appearance.
- Individual drawer locking allows the user to leave one or more drawers unlocked with the push lock in the locked position.

- All filing cabinets are installed with a central high security key or digital push lock. Additional drawers can be installed with key, digital or mechanical combination locks. Key lock made in Germany (Euro Locks).
- Anti-tilt device.
- Handles and label holders are made of rubber coated plastic (soft touch).
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Fire Resistant Filing Cabinets


VALBERG

series: **VFC**

grade: **LFS 60**



Wheels available



Drawer capacity

up to 120 kg

Model								
VFC 2	810	545	673	260	388	510	2	160
VFC 3	1160	545	673	260	388	510	3	230
VFC 4	1510	545	673	260	388	510	4	308

* The outer depth is given without the handle and the lock

* Slight weight deviation allowed



Key lock



Digital lock



Combination lock



VFC 2



VFC 3



VFC 4

- Fire resistance – 1 hour LFS 60 according to EN 15659.
- Each drawer is controlled by 4 bolts (2 on bottom and 2 on top of drawer).
- The safe body and the door are manufactured with two inter-welded walls that are filled by fire resistant concrete.
- Drawer capacity- up to 120 kg
- Drawers adjustable for A4 and Foolscap files
- Electrostatic powder coating is applied to all sides including the bottom. Scratchresistant providing a lifetime quality appearance
- All filing cabinets are installed with a central high security key or digital push lock. Additional drawers can be installed with key, digital or mechanical combination locks.
- Anti-tilt device
- Handles and label holders are made of rubber coated plastic
- Individual drawer locking allows the user to leave one or more drawers unlocked with the push lock in the locked position
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Fire Resistant Safes

series: **FRS**
grade: **LFS 60**

VALBERG


YOU GOT MORE



Laser
Cut
Effect

MULTI
FIRE SYSTEM

LFS 60
ECB-S
certified



FRS 30



FRS 133




Optional wheels
available



Model										
FRS 30	296	430	365	188	326	236	-	tray	34	15
FRS 32	315	445	425	207	341	296	-	tray	38	21
FRS 49	490	361	425	382	257	296	-	1+tray	46	29
FRS 51	510	445	425	402	341	296	-	1+tray	51	41
FRS 66	653	485	450	467	346	301	85x343	1	75	49
FRS 67	713	485	450	527	346	301	85x343	1	91	49
FRS 75	792	485	450	607	346	301	85x343	1	105	64/8
FRS 93	972	565	450	786	426	301	85x423	2	125	98/10
FRS 120	1255	711	580	1034	546	418	135x515	2	290	236/26
FRS 133	1391	711	580	1170	546	418	135x515	2	310	267/26
FRS 165	1708	711	580	1487	546	418	135x515	3	390	340/26

- Key lock + Key lock
- Digital lock + Key lock
- Digital lock + Thumbturn
- Key lock + Key lock + Handle
- Digital lock + Key lock
- Digital lock + Handle

The outer depth is given without the handle and the lock.

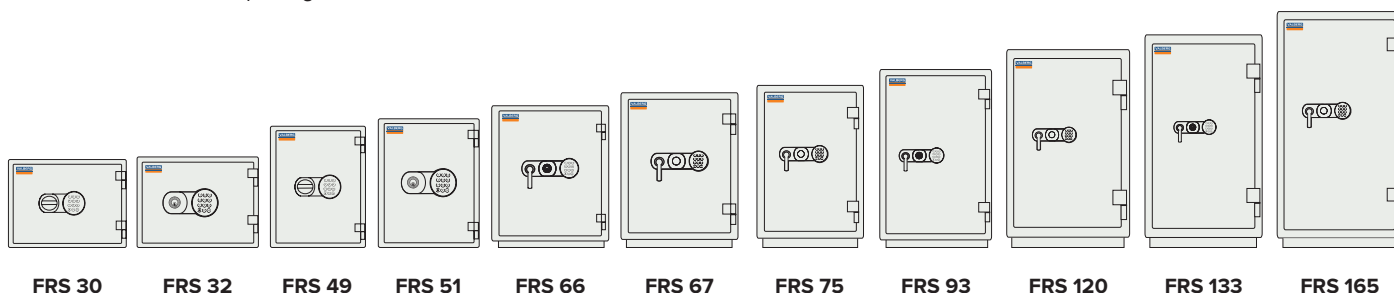

- Fire resistance – LFS 60 according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Dead bolts on hinge side
- The thickness of wall 50 mm, 70 mm, 80 mm.
- The thickness of door 95 mm, 117 mm.
- Pull out tray or drawer included.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Fire Resistant Safe Cabinet

VALBERG

series: **Brandmauer LFS**

grade: **LFS 30**



Model										
BM 1260	1220	600	520	1060	460	335	2	98	180	
BM 1220	1220	930	520	1065	790	335	2	127	303	
BM 1993	1950	930	520	1795	790	335	4	186	510	
BM 1951	1950	1250	520	1795	1110	335	4	229	717	




Key lock
Kaba 71111




Digital lock
Grade B (PS-610)


The outer depth is given without the handle and the lock.




BM LFS 1260



BM LFS 1220



BM LFS 1993



BM LFS 1951

- Double wall construction
- Gap between inner and outer walls is filled with heat insulating material which protects the content from fire.
- Door thickness – 60mm
- Accessories – Inner compartment, telescopic shelf, telescopic frame.
- Three point locking mechanism, 5 bolts /20mm in diameter/.
- Door opening angle up to 180 degrees due to external hinges.
- Standard delivery with double-bit high security key lock with two keys + handle
- Maximum shelf load – 40 KG
- Standard Colour – RAL 7035 (light grey) / RAL 7024 (graphite grey).

VAULT DOORS



Vault Doors

series: **AVD**

grade: **III, V**

VALBERG



- Burglary resistance – grade III or V according to EN-1143/1 standard.
- Ideal for securing anything from artworks to national bank vaults.
- Designed to be set into concrete walls
- Ultra high density, reinforced concrete core with steel cladding
- All doors come with two class II/B locks as standard
- Locks on doors are located on the outside only
- Can be supplied with key, mechanical combination or electronic locks. Electronic locks offer many advantages: dual code, time delay, opening window, wrong code lockout
- All doors have external hinges and can only open outwards. They will all open 180° where the surrounding building allows it
- Option: an emergency door which can be used in the event that the main door cannot be operated

Innovative solutions for series AVD

VALBERG

grade: III, V



Grill door



Emergency door

Vault Doors


series: **AVD**

grade: **III,V**

VALBERG



MULTI
LAYER SYSTEM

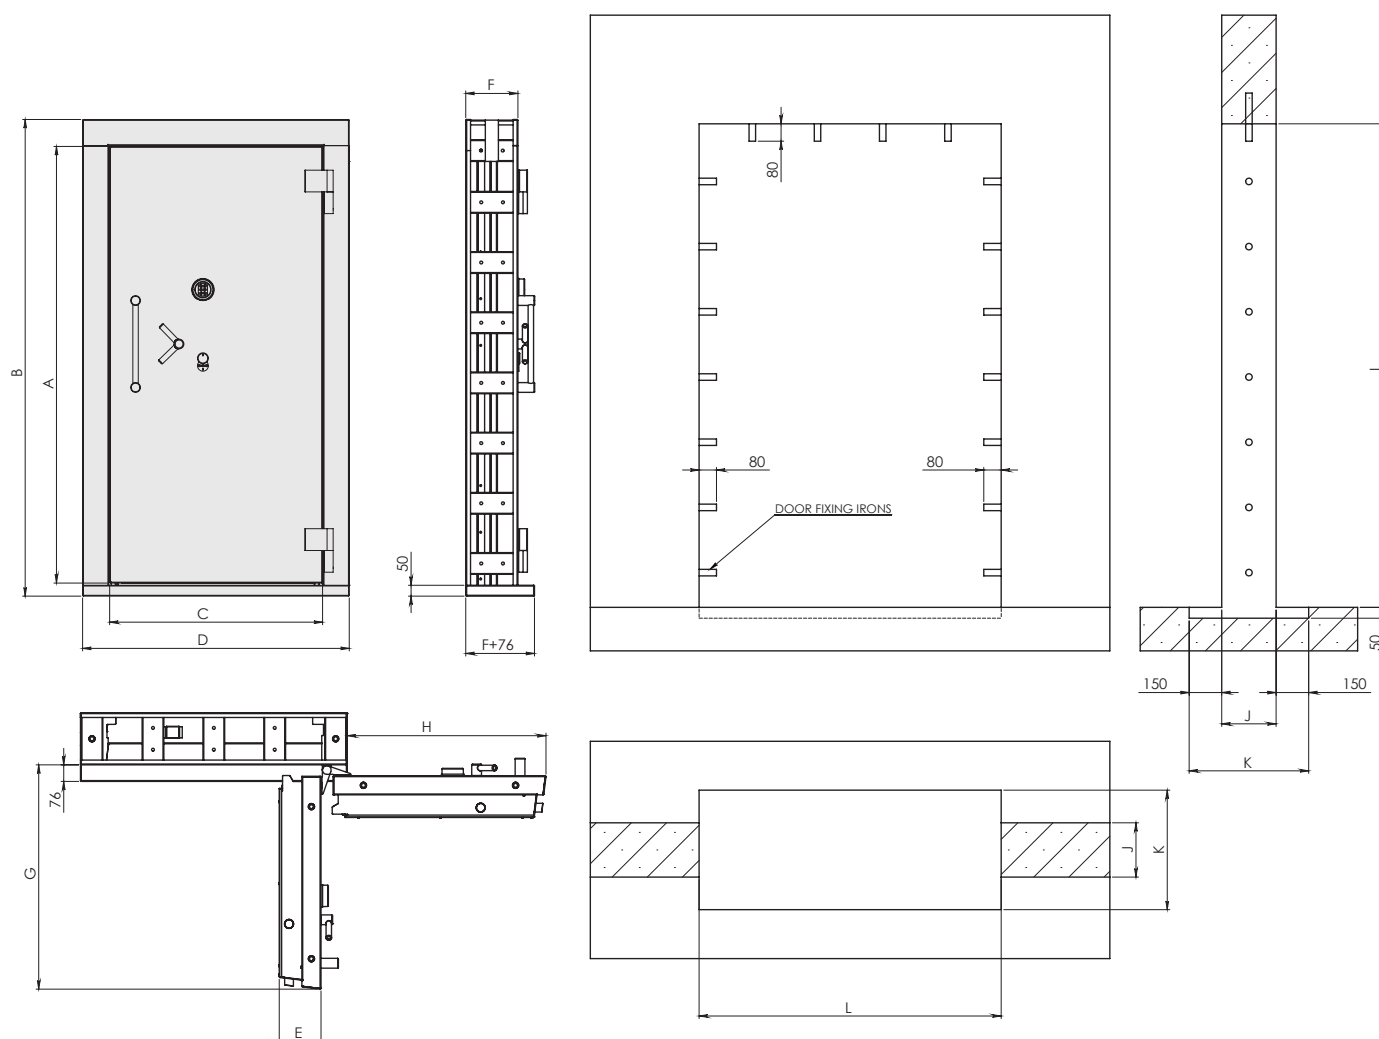

Model	Grade	Dimensions, mm												Free clearance	Weight kg
		A	B	C	D	E	F	G	H	I	J	K	L		
AVD 3	III													2000x900	720
AVD 5	V	2010	2019	980	1227	192	240	1032	914	2350	240	240	1480		800

Innovative solutions for series EVD

VALBERG

grade: I



Inside view




Locks

Vault Doors

series: **EVD**

grade: **I**

VALBERG

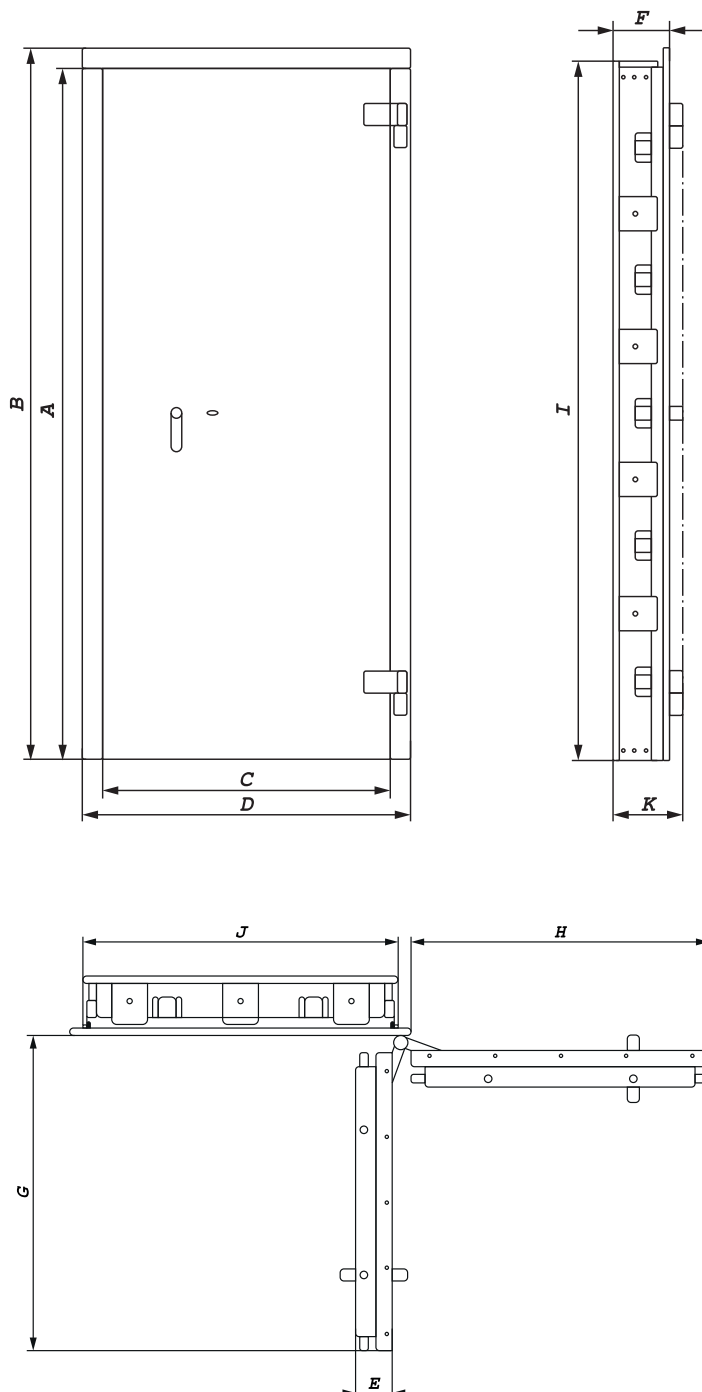

- Burglary resistance – grade I according to EN-1143/1 standard.
- Ideal for panic rooms, gun rooms, cash rooms and secure rooms.
- Designed to be into concrete walls.
- Easy mounting by anchoring bolts what reduce an installation cost and time.
- All doors come with one class I/A key lock as standard.
- Can be supplied with key, mechanical combination or electronic locks.
- Electronic locks offer many advantages: dual code, time delay, opening window, wrong code lockout.
- All doors have external hinges and can only open outwards. They will open 180° where the surrounding building allows it.
- Option upon request: emergency opening option from inside in case someone will close the door from outside.
- Colour: Primer paint or standard paint RAL 7024 / RAL 7035

Model	Grade	Dimensions, mm											Weight kg
		A	B	C	D	E	F	G	H	I	J	K	
EVD 1	I	2100	2138	860	986	105	165	917	863	2100	910	209	188
EVD 2	I	2100	2138	960	1086	105	165	1017	963	2100	1010	209	204

FURNITURE SAFES



Furniture Safes

series: **T**

VALBERG



T 170

T 140




T 230




T 280

Model									
T 140	140	195	140	138	193	95	-	3	2.5
T 170	170	260	230	168	258	185	-	5	8
T 200	200	310	200	198	308	155	-	5.5	9
T 230	230	310	250	228	308	205	-	6.5	14
T 250	250	350	250	248	348	205	-	7	18
T 280	280	350	300	278	348	255	1	8	25



The outer depth is given without the handle and the lock.

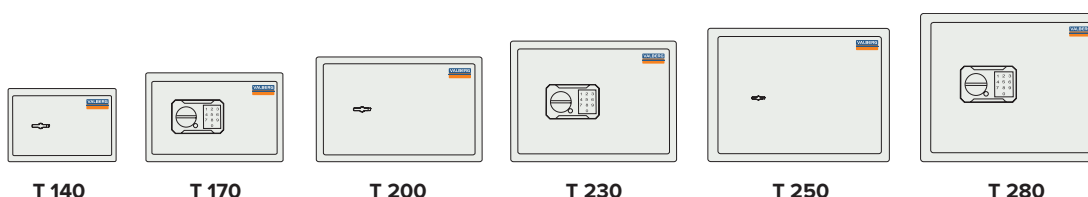

T 140

T 170

T 200

T 230

T 250

T 280

- Single-walled furniture safes.
- Steel thickness of front panel – 2,8 mm.
- Steel thickness of walls – 1,2 mm.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).


Hotel Safes

series: **SH**

VALBERG




SH - 20 EL

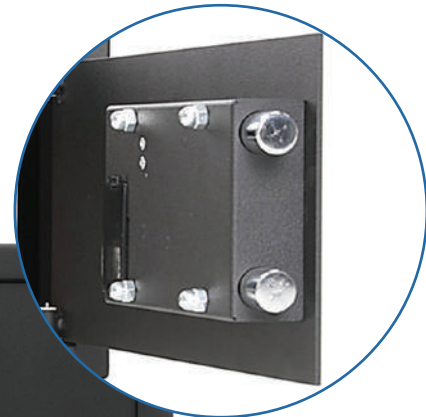

Model										
SH 20 EL	200	430	415	196	426	347	-	13	29	



Digital lock



SH - 20 EL

- Single-walled furniture safes.
- Equipped with an electronic lock PLS-2.2 + emergency master key, powered by 1 9V type 6LR61 battery
- Anchoring to the floor and back wall.
- Steel thickness of front panel – 2,8 mm.
- Steel thickness of walls – 1,2 mm.
- The lock is provided with sound and light indicators
- Color: RAL 9005 (black).

TECHNICAL INFORMATION



Locks, Dials, Keypad

SAFES AND LOCKS COMPATIBILITY MATRIX

MODEL	PS 210	PS 310	PS 610 / PS 650	LG Basic/ M Locks EM2020/2050/ Wittkopp Primor 1000	Code Combi B 90	Code Combi B 90 x 2
BS	+	+				
SB	+	+				
Barrier	+	+				
Bastion M			+	+	+ (except Bastion M 35, M 46)	+ (except Bastion M 46, Bastion M 46 and Bastion M 50)
Fort M			+	+	+ (except Fort M 35)	+ (except Fort M 35, Fort M 50 and Fort M 60)
Banker M			+	+	+ (+KL)	+ (except Banker M 55)
Burgas			+	+	+ (+KL)	+
BRF	+	+				
FSB (32/46/67)	+	+				
FSB Double Door			+	+	+	+
ASG/WS			+	+	Only ASG/ WS 8, Combi, WS 14	Only ASG/ WS 8, Combi, WS 14
Garant			+	+	+	Only Garant 1993
Granit			+	+	Only Granit 6465, 8465, 1065, 1265, 5450	
DSC			+	+		
ASD	+	+				
Arsenal	+	+				
ASK	+	+ (except ASK 20)	Only ASK 90	Only ASK 90		
Brandmauer		+	+	+	+	+

* Acceptable weight tolerance +/-10%.













The producer reserves the right for minor changes of weight, colour and dimensions of products without prior notice. The changes can be of different nature. However all the efforts should be made to ensure that the information in this catalog is most accurate. For details please contact our official distributors. Product dimensions do not include the dimensions of locks and handles.

Locks, Dials, Keypad

LOCK FUNCTIONS SUMMARY

FUNCTIONS	PS 210	PS 310	PS 550	PS 610	PS 650
					
SECURITY LEVEL, ECB-S, EN 1300	A	B	B	B	B
MASTER CODE	1	1	1	1	1
USER CODE	9	9	9	9	9
DUAL CODE	+	+	+	+	+
TIME DELAY (0-99 MIN.)	+	+	+	+	+
OPENING WINDOW (1-9 MIN.)	+	+	+	+	+
TIME DELAY OVERRIDE	+	+	+	+	+
WRONG CODE LOCKOUT	+	+	+	+	+
ATTACK ALARM	-	-	-	-	-
CONNECT TO ALARM	-	-	-	+	+
AUDIT OPENING ID	-	-	-	-	-
EMERGENCY KEY	-	-	-	-	+

Locks, Dials, Keypad

Locks ▼	Grade ▼	KEYPAD					
							
		E01	E02	E21	E31	E36	E33
	A	+	+	+	+		+
PS210							
	B	+	+	+	+		
PS310							
	B	+ Boltwork M3/ M6 + handle	+ Boltwork M3/ M6 + handle		+ Boltwork M3/ M6 + handle		+ Boltwork M3/ M6 + handle
PS550							
	B				+ Boltwork M3	+ Boltwork M3/ M6 + handle	
PS610							
	B						+ Boltwork M3/ M6 + handle
PS650							
	A B						
LG/Sargent							

Transport information

PRODUCTS ON PALLET

MODEL	Type of pallet	Quantity on the pallet	MODEL	Type of pallet	Quantity on the pallet
ASD 19	1x1.2	18	BASTION M 60	0.8x1.2	2
ASD 32	1x1.2	6	BASTION M 80	0.8x1.2	2
ASG WS/3	1x1.2	6	BASTION M 1068	0.8x1.2	2
ASG WS/5	1x1.2	4	BASTION M 1368	0.8x1.2	2
ASG WS/6	1x1.2	4	BASTION M 1585	0.8x1.2	1
ASG WS/8	1x1.2	4	BASTION M 1668	0.8x1.2	2
ASG/combi	1x1.2	2	BASTION M 67	0.8x1.2	2
ASG WS/14	1x1.2	2	BASTION M 99	0.8x1.2	2
BANKER M 1055	0.8x1.2	1	BM 1220	1x1.2	2
BANKER M 1255	0.8x1.2	1	BM 1260	0.8x1.2	3
BANKER M 1285	0.8x1.2	1	BM 1951	1.2x1.3	2
BANKER M 1368	0.8x1.2	1	BM 1993	1x1.2	2
BANKER M 1568	0.8x1.2	1	BRF 30	1x1.2	16
BANKER M 55	0.8x1.2	2	BRF 32	1x1.2	16
BANKER M 67	0.8x1.2	2	BRF 46	1x1.2	12
BANKER M 85	0.8x1.2	2	BRF 49	1x1.2	18
BARRIER 1265	0.8x1.2	2	BRF 67	1x1.2	8
BARRIER 3040	0.8x1.2	14	BRF 95	1x1.2	6
BARRIER 3045	1x1.2	12	BURGAS 1061	0.8x1.2	1
BARRIER 3450	0.8x1.2	12	BURGAS 1361	0.8x1.2	1
BARRIER 45	1x1.2	8	BURGAS 1561	0.8x1.2	1
BARRIER 46	1x1.2	8	BURGAS 67	0.8x1.2	1
BARRIER 6465	0.8x1.2	2	BURGAS 85	0.8x1.2	1
BARRIER 67	1x1.2	8	DSC 100	0.8x1.2	2
BARRIER 8465	0.8x1.2	2	DSC 120	0.8x1.2	2
BARRIER 90	0.8x1.2	2	DSC 67	0.8x1.2	2
BASTION M 100	0.8x1.2	2	DSC 80	0.8x1.2	2
BASTION M 35	0.8x1.2	2	FC 1	0.8x1.2	2
BASTION M 46	0.8x1.2	3	FC 2	0.8x1.2	2
BASTION M 50	0.8x1.2	3			

Transport information

PRODUCTS ON PALLET

MODEL	Type of pallet	Quantity on the pallet
FC 3	0.8x1.2	2
FC 4	0.8x1.2	2
FORT M 1068	0.8x1.2	2
FORT M 1285	0.8x1.2	1
FORT M 1368	0.8x1.2	2
FORT M 1385	0.8x1.2	1
FORT M 1566	0.8x1.2	1
FORT M 1585	0.8x1.2	1
FORT M 1668	0.8x1.2	1
FORT M 1685	0.8x1.2	1
FORT M 35	0.8x1.2	2
FORT M 50	0.8x1.2	2
FORT M 60	0.8x1.2	2
FORT M 67	0.8x1.2	2
FORT M 80	0.8x1.2	2
FORT M 99	0.8x1.2	2
FRS 120	0.8x1.2	2
FRS 133	0.8x1.2	2
FRS 165	0.8x1.2	2
FRS 30	0.8x1.2	24
FRS 32	0.8x1.2	20
FRS 49	1x1.2	18
FRS 51	1x1.2	12
FRS 66	0.8x1.2	6
FRS 67	0.8x1.2	6
FRS 75	0.8x1.2	6
FRS 85	0.8x1.2	6
FRS 93	1x1.2	4
FRS 30 PLUS	1x1.2	18
FRS 32 PLUS	1x1.2	18

MODEL	Type of pallet	Quantity on the pallet
FRS 36 PLUS	1x1.2	18
FRS 49 PLUS	1x1.2	18
FRS 51 PLUS	1x1.2	12
FSB 12130	0.7x1.3	1
FSB 19130	0.7x1.3	1
FSB 1993	0.8x1.2	1
FSB 32	1x1.2	12
FSB 46	1x1.2	8
FSB 67	1x1.2	8
GARANT 110	0.8x1.2	2
GARANT 133	0.8x1.2	2
GARANT 165	0.8x1.2	2
GARANT 1993	0.8x1.2	1
GARANT 46	1x1.2	8
GARANT 67	1x1.2	6
GARANT 75	0.8x1.2	2
GARANT 95	1x1.2	4
GRANIT 1065	0.8x1.2	2
GRANIT 1265	0.8x1.2	2
GRANIT 3450	0.8x1.2	8
GRANIT 4450	1x1.2	6
GRANIT 46	1x1.2	8
GRANIT 5450	1x1.2	6
GRANIT 6465	0.8x1.2	2
GRANIT 65	1x1.2	6
GRANIT 8465	0.8x1.2	2
GRANIT 90	1x1.2	4
GS 1253	0.8x1.2	4
GS 1423	0.8x1.2	10

Transport information



PRODUCTS ON PALLET

MODEL	Type of pallet	Quantity on the pallet
GS 1433	0.8x1.2	8
GS 1443	0.8x1.2	6
SB 1000	1x1.2	6
SB 220	0.8x1.2	42
SB 290	0.8x1.2	36
SB 300	0.8x1.2	20
SB 350	1x1.2	30
SB 450	1x1.2	16
SB 550	1x1.2	16
SB 600	1x1.2	8
SB 800	1x1.2	8
T 140	1x1.2	100
T 170	1x1.2	96
T 200	0.8x1.2	30
T 230	0.8x1.2	50
T 250	0.8x1.2	30
T 280	0.8x1.2	30

FULL TRUCK QUANTITY:

MODEL	Quantity in a full truck
ASG/WS 3	156
ASG/WS 5	104
BM 1220	78
BM 1260	120
BM 1993	52
BM 1951	40
FSB 12130	30
FSB 19130	30
FSB 1993	33
GARANT 1993	30

SECURITY LEVELS AND INSURANCE AMOUNTS

Security Levels	Symbol	Description	Resistant Unit	Amount Insured (without EMA)	
				Private Use	Commercial Use
ECB-S / VdS (according to EN 1143-1; EN 14450)					
S1		Security Cabinet	40 TP / 2 SU EN14450	max. 5 000 €	non-insurable
S2		Security Cabinet	60 TP / 5 SU EN14450	max. 20 000 €	max. 2 500 €
0		Safe	30 RU EN 1143-1	max. 40 000 €	max. 10 000 €
I		Safe	30/50 RU EN 1143-1	max. 65 000 €	max. 20 000 €
II		Safe	50/80 RU EN 1143-1	max. 100 000 €	max. 50 000 €
III		Safe	80/120 RU EN 1143-1	max. 200 000 €	max. 100 000 €
IV		Safe	120/180 RU EN 1143-1	max. 400 000 €	max. 150 000 €
V		Safe	180/270 RU EN 1143-1	negotiable / keine Empfehlung	max. 250 000 €
D-I		Deposit Safe	30/50 RU EN 1143-2	max. 65 000 €	max. 20 000 €
FIRE PROTECTION GRADES					
Fire Protection Grade	Symbol	Description	Certification Standard	Maximum Temperature in the Safe	
LFS 30		Light Fire Protection 30 Minutes	EN 15659	170° C	
LFS 60		Light Fire Protection 1 hour	EN 15659	170° C	

All safes with fire protection are certified in accordance with ECB-S, Germany.

GENERAL TERMS AND CONDITIONS OF BUSINESS OF PROMET SAFE

1. General provisions and scope of application of these GTC All deliveries, services and offers to our customers are made solely on the basis of these General terms and Conditions of Business (GTC). We shall not accept terms and conditions from the customer, which conflict with or differ from our Terms and Conditions. They will also not be accepted if we do not explicitly reject them after receipt. Deviations from these General terms and Conditions at our account are only effective if they are confirmed by us in writing.

2. Offer and contract conclusion

All orders directed to us require our written confirmation to become effective. The content of our confirmation is solely applicable. Drawings, illustrations, dimensions, weights and other performance data are only binding if this is explicitly agreed upon in writing.

3. Partial deliveries

We explicitly reserve the right to make partial deliveries in as much as this is reasonable, taking the interests of the buyer into consideration.

4. Prices Value-added tax to be added.

The prices quoted by the seller refer exclusively to the goods, performances and other services quoted in the offer. If the purchaser wants to deviate from them, then the seller may adjust prices accordingly.

5. Contract conclusion

After a time period of six weeks after contract conclusion, the seller is entitled to adjust the prices for the following reasons:

- a) Significant changes in the exchange rate for imported goods or special taxes and fees, which are charged by law.
- b) Increases in costs due to official administrative measures.
- c) Increases of labor costs and increased material costs.
- d) Increased transportation costs (if freight is included in the price of the offer)
- e) Accelerated delivery as well as any additional requests by the customer to which the seller agrees, such as changes of delivery instructions and times of availability, quantities, format, or similar specifications in reference to goods, performances and other services.
- f) Delays, for which the purchaser is responsible as a result of his instructions or failure to provide the required instructions.

6. Delivery

Delivery is made by freight, mail or rail for the account and risk of the purchaser; the purchaser carries the risk even if post paid delivery is agreed upon. The goods are not insured by the seller. Any damage during transport must be immediately reported to the freight Company, postal agency or rail agency. For required transport to different stories (steps up or down as well as transport over steps into buildings) consult our transport service.

7. Delivery and time of performance

The delivery dates and times of performance noted by us are strictly non-binding. The time of delivery for ordered goods starts from the day of the order confirmation and ends the day the goods leave the company. If the customer requires changes after receipt of our order confirmation, then the time of delivery starts only after our written confirmation of the change order. We are authorized to make partial deliveries and partial services. Acts beyond our control authorize us to delay the delivery or service for the duration of the hindrance or to withdraw in full or in part from noncompleted parts of the contract. Acts beyond our control include all circumstances which significantly complicate the delivery / performance or which make it impossible, such as sovereign measures, strikes, lock-outs, operational problems (such as fire, lack of energy) as well as restrictions of transportation routes, regardless if these occurrences happen with us, the delivery plant, a transport carrier or a third party. In this case, the customer can request an explanation, if we intend to withdraw or if we will be able to deliver within a certain suitable time frame. The customer may withdraw after a statutory time period as required by law insofar the goods/services are not reported to be ready to be shipped or be met by the deadline.

8. Payment

The amount of the invoice is payable net within 30 days from the invoice date or within 8 days from the invoice date with a 2% discount insofar payment in cash without discount has not been agreed upon. For payment delay, 12% interest is charged. This also applies for partial deliveries.

9. Warranties

The seller reserves the right for any deviations from the dimensions or construction changes or parts of construction. The same applies correspondingly to all services and other performances. Weight data is provided as exact as possible, but non-binding. The customer must check the goods immediately for obvious deficiencies. Externally recognizable transport damage must be confirmed immediately by the freight deliverer, according to insurance regulations. The reporting time frame for hidden damage is 3 days from acceptance of the goods. Obvious deficiencies must be reported in writing immediately after receipt of the goods, hidden deficiencies within a week after discovery of the deficiency. For valid deficiencies, we provide repair or new delivery free of charge, at our option. The warranty period as set forth by law is 24 months. If the warranty provision provided by us fails within a fair grace period, a request for a price reduction or rescission of the contract can be made. Additional warranties and/or claims for indemnities for what ever legal reason are excluded, unless they are based on intent or gross negligence or the explicit written assurance of features. Please see our website for full warranty Terms and Conditions.

10. Reservation of ownership

We reserve ownership to all delivered goods subject to reservation until complete payment has been received. The recipient is entitled to resell the goods in the ordinary course of business. Additional disposition (pledge as collateral, transfer by way of security or sale after effected cessation of payments) is not permitted. Garnishments or goods subject to reservation must be reported immediately with provision of the garnishment protocol. If the customer sells or disposes of goods subject to reservation for credit, then the resulting purchase price demand with accrual is considered to be surrendered to us. The customer is authorized to collect these demands until he is banned from doing so due to payment delay or financial collapse. In this case, the customer must submit to us a statement of transfer and a confirmation of reservation of title by third parties. We reserve the right to changes in size and color as well as technical improvements. All plans, sketches, drawings, illustrations or other documentation remains our property. These items may not be made accessible to third persons without our explicit written permission, nor may they be copied or duplicated.

11. Rescission


We can withdraw from a contract if the customer provided us with incorrect data about his credit worthiness and if we become aware of circumstances which justify doubts about the customer's credit worthiness or the credit worthiness becomes invalid: i.e. dishonored checks or notes, request for affidavit, non-insurability with a credit insurance, etc.) or if a petition for insolvency proceedings is filed.

12. Place of performance and jurisdiction

The place of jurisdiction for all legal disputes arising from the existing legal relationship with the customer - including notes and checks - is the Bulgaria, Kazanlak and Stara Zagora.

13. Written form and invalidity, severability clause

Changes to this contract to be valid always require them to be in written form. Even if one of more sections of this clause or a significant part of these clauses become invalid fully or in part, the effectiveness of the remaining clauses still remains intact.

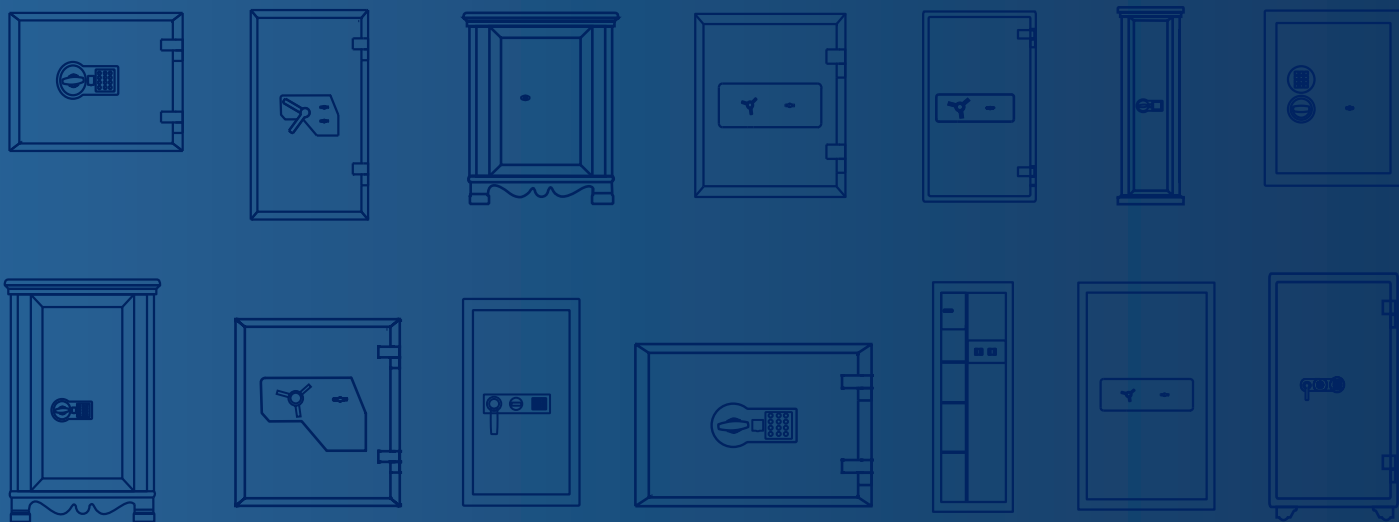

PROMET

Feel Safe ■

60, Rozova dolina str.,
Kazanlak, Bulgaria, 6100
Phone: +359 (431) 6-28-43
www.promet-safe.com
E-mail: export@promet-safe.com